

TECHNICAL SPECIFICATIONS Wall panel W12060

Features

- Decorative solid wood composite wall panel for dry indoor spaces
- Durable, chemical resistant finish
- Water resistant top layer
- Heat resistant up to 120 °C (not suitable for use in the vicinity of open flames)

Material

Woodio solid wood composite with wood content up to 80% by volume. High-quality UV and scratch resistant gel coat finishing.


General dimensions

	Metric	Imperial
Outer dimensions (LWH)	1197 x 597 x 6 mm	47 x 23,5 x 0,24"
Tolerance	±1mm	0,04"
Weight	5 kg	11 lbs

Installation

Woodio Wall requires a dry, clean and even surface to be installed on. Most construction adhesives or epoxy mortars can be used.

The package contains installation instructions.

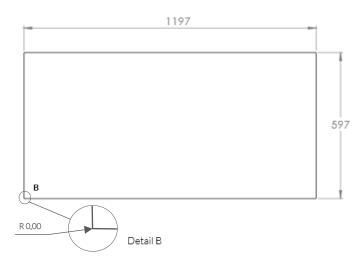

Certification

Wood chips used in the product are FSC® certificated which ensure that they are from forests that are managed responsibly. The used birch chips are originating from the Finnish forest industry sidestreams.

Declared performance

Product has M1 classification

M1 is a strict Finnish emission standard for classification of building materials. <u>https://cer.rts.fi/en/m1-emission-class-for-building-</u> <u>material/m1-criteria-2/</u>

Key dimensions

All dimensions are in millimeters and can vary +/-1 $\,\rm mm$

